



**INSTALLATION AND OWNER'S MANUAL
N9005 LIGHT BAR VISOR for
ALL NATIONAL CYCLE LIGHT BARS**

PREPARATION

This product is designed to fit on all National Cycle Light Bars including but not limited to:

N920 N920E	N927 N927E	N935 N935E	N942 N942E
N921 N921E	N928 N928E	N936 N936E	
N922 N922E	N929 N929E	N938 N938E	
N923 N923E	N930 N930E	N939 N/A	
N925 N925E	N932 N932E	N940 N/A	
N926 N926E	N933 N933E	N941 N941E	

PARTS LIST


<u>Description</u>	<u>Qty.</u>
Lightbar Visor N9005	1 Set



Phillips Screw Driver

INSTALLATION to N942 and N942E

1. Loosen the rim of the light head assembly. (Phillips Screw Driver).
2. Slip taps of Visor under rim. Item E.
3. Shape Visor / Visor Tabs to conform to contours of light head assembly.
4. Retighten rim.

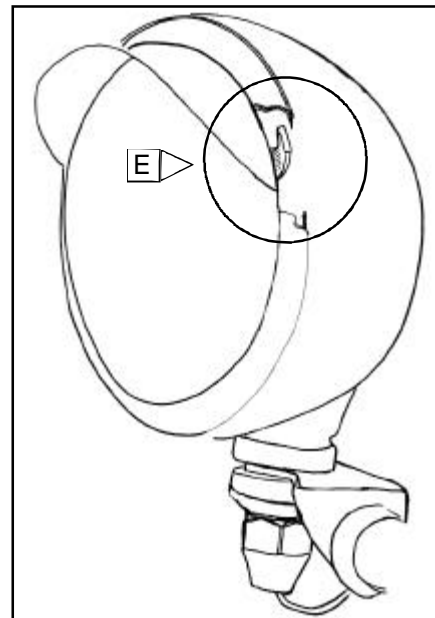

INSTALLATION to all other Light Bars

1. It is not necessary to loosen the rim. Push bulb in to create gap between bulb and rim.
2. Slip taps of Visor under rim. Item E.
3. Shape Visor / Visor Tabs to conform to contours of light head assembly.

MAINTENANCE

The high quality chrome finish of your National Cycle Light Bar Visor can be maintained with any quality chrome cleaner and or polish.