



.....**Mounting Suggestions**
Yamaha Road Star 1600/1700 1999-2000
.....**One-Piece Seat**

- Tools Required:
- 10 mm socket
 - 10 mm wrench

- Hardware:
- Stock 6 mm Rear Fender Bolt
 - White Nylon Washer x1 (Included)



Baseplate Features:

The one-piece, marine-grade fiberglass baseplate is a direct replacement for the stock, two-piece seat. Rubber bumpers are positioned to prevent the seat from touching the frame and fender.

Stock Seat Removal Steps

1. Open seat latch by turning ignition key counter-clockwise.
2. Remove stock seat.
3. Remove mounting bracket by removing the three 6 mm bolts with a 10 mm socket. This bracket is not required for the Mustang seat.
4. Reinstall the three 6 mm Allen bolts into the fender to fill the holes.
5. Remove 8 mm mounting bolt with a 10 mm socket


Step 1



Step 3



Step 5

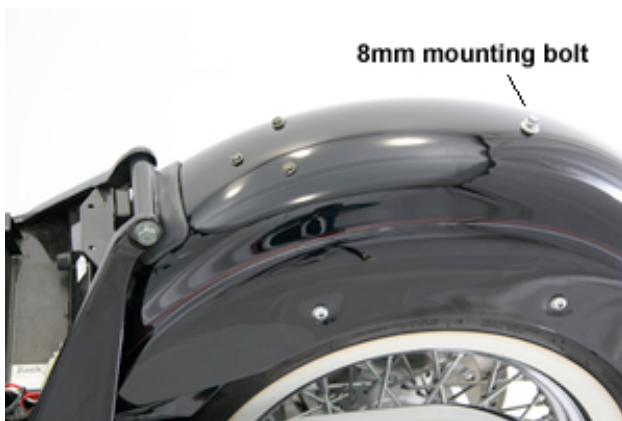

Mounting of Mustang Seat

1. Set seat on frame, aligning the rear bracket with the mounting hole in the fender.
2. Slide the supplied white nylon washer under the bracket and then install the stock 8 mm bolt. **DO NOT TIGHTEN YET!**
3. Align the seat nose bracket with the frames latch. Push the seat nose down to lock.
4. Now tighten the stock 8 mm bolt with a 10 mm wrench.
5. Turn the ignition key counter-clockwise to unlock the seat so it can be moved to the left to check the engine oil level.

Step 2



Step 3



Step 5



Enjoy the comfort of your new Mustang Seat!



These steps are guidelines to help you install your new Mustang product. If you need further assistance please call us at 800-243-1392, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to questions@mustangseats.com or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under "Support".

Ref. part #'s 75620, 76168